




STAR®-series FAB33

Self-Retractable Lifeline (SRL) 33 meter

The FAB33 offers 33 meters freedom of movement to the user and limits braking distance and fall arrest forces to a minimum in case of a fall.

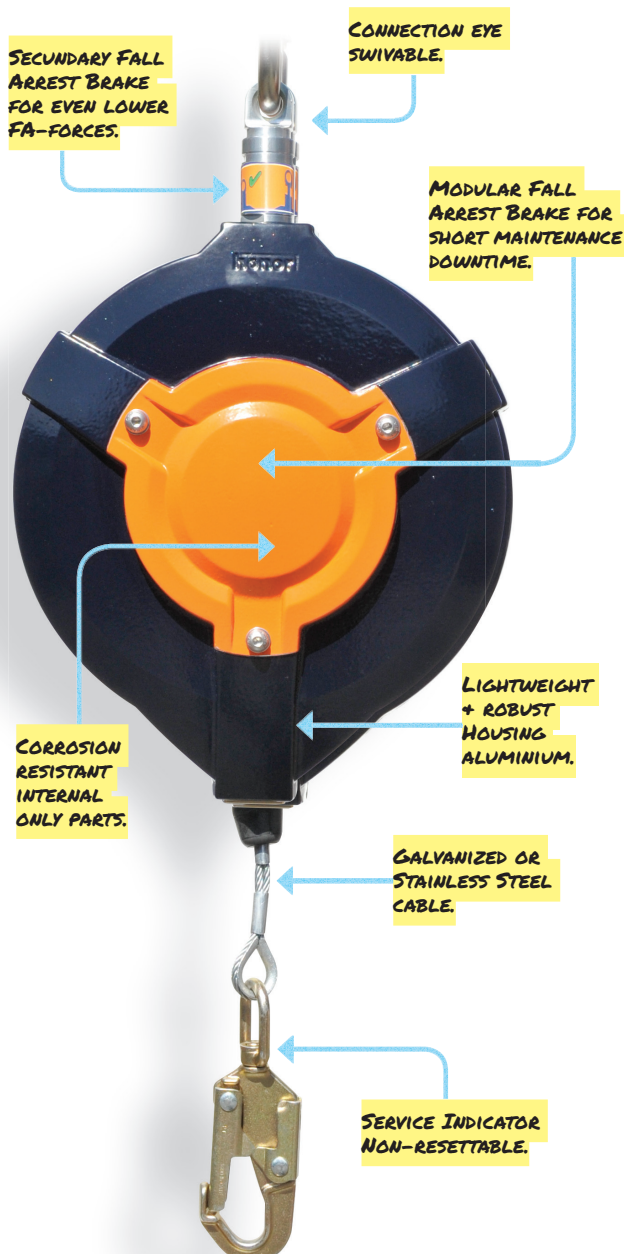

FAB33 devices are available with galvanized and stainless steel wire ropes.

Specifications FAB33-G & -S:

- STAR® - industrial design
- Modular quick-acting braking system
- Minimum braking distance
- Very low fall arrest forces due to primary & secondary fallarrest brakes
- Very low examination & inspection costs
- Lightweight, robust alu housing & modules - powder coated (18.7 kg - 41.2 lbs)
- Corrosion-resistant stainless steel & aluminium internal components
- Snaphook with non-resettable 'service-indicator'
- Swivable connection eye
- Max. 33 m - 108 ft
- Max. 140 kg - 309 lbs
- Min. -40°C/F, max. 55°C - 130°F
- Ergonomic Design-Handle available

European standards: [EN 360:2002](#)

US-Standard: [ANSI/ASSE Z359.4-2012-A](#) pending

Art.no: R011.033.000 (FAB33-G Galvanized Wire)

Art.no: R011.033.001 (FAB33-S Stainless Steel Wire)

European patent no: [002503698-001](#)

USA Patent: [pending](#)